

KINETICS™

Isolation Hangers Model FH



Description

Kinetics Model FH hangers are recommended for use in isolating high frequency noise produced by suspended equipment, piping, and ductwork. FH Hangers incorporate a coded, molded, inorganic fiberglass isolation pad attached to a steel load transfer plate and to a stamped or welded hanger bracket. Hangers will allow a support rod misalignment through a 30° arc. Isolation brackets will carry 500% overload without failure. Fiberglass pads are fine (00027" diameter/6.8 microns) bonded annealed glass fibers which are stabilized by severely overloading the material during manufacture, and then coated with a flexible moisture-impervious elastomeric membrane. Fiberglass is unique in that the natural frequency is constant over a wide operating load range, and the stiffness increases proportionately with load applied. Model FH fiberglass Isolation Hangers are available in sizes with capacities from 250 to 900 lbs. (113 to 408 kg), with deflection of .18 to .27" (5 to 7 mm). Kinetics Model FH hangers are recommended for the isolation of vibration produced by suspended mechanical or electrical equipment, in-line and exhaust fans, ductwork, piping, etc.

Application

Kinetics Model FH hangers are recommended for use in isolating any suspended source of audible frequency vibration, or noise, located near a critically quiet area.

Isolation of noise in piping and ductwork systems from a building structure is a typical use of Model FH hangers. Piping within 100 pipe diameters of connection to mechanical equipment should be isolated with Model SFH spring and fiberglass hangers to control transmission of low frequency vibration as well as noise.

High sound transmission loss ceiling systems can be effectively isolated by Model FH hangers. When isolating sources of predominately low frequency noise such as flyover aircraft, Model SFH hangers are recommended.

Model FH hangers are shipped fully assembled and ready for installation in threaded rod suspension systems.

Specifications

Vibration isolators with maximum static deflection requirements under the operating load conditions not exceeding .27" (7 mm) shall be hangers consisting of a precompressed molded fiberglass insert, complete with load transfer plate and assembled in a stamped or welded steel bracket.


The fiberglass insert shall be individually coated with a flexible, moisture-impervious elastomeric membrane. The insert shall be molded from glass fibers with fiber diameters not exceeding .00027" (6.8 microns) and with a modulus of elasticity of 10.5 million PSI (738,223 kg/cm²).

Natural frequency of fiberglass vibration isolators shall be essentially constant for the operating load range of the supported equipment. Vibration isolators shall be coded to indicate load capacity.

The hanger bracket shall be designed to carry a 500% overload without failure and to allow a support rod misalignment through a 30° arc without metal-to-metal contact or other short circuit.

Isolation hangers shall be selected by the manufacturer for each specific application to comply with deflection requirements as shown on the Vibration Isolation Schedule or as indicated on the project documents.

Vibration isolation assembly shall be Model FH, as manufactured by Kinetics Noise Control, Inc.

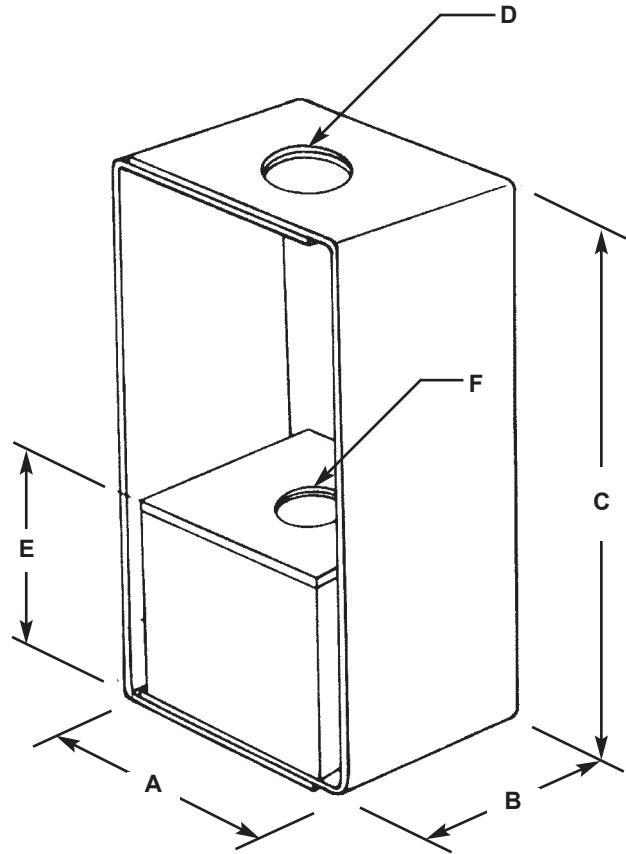

	Hanger Type	Fiberglass Type	Rated Capacity	Rated Deflection	Isolator Size	A	B	C	D	E	F
English Units	FH-250A	L	250 lbs.	.27"	2.5"	3.15"	2.25"	5.69"	0.81"	1.13"	0.69"
	FH-500A	Q	500 lbs.	.18"	2.5"	3.15"	2.25"	5.69"	0.81"	1.13"	0.69"
	*FH-900C	R	900 lbs.	.18"	3.0"	4.00"	4.75"	8.00"	1.13"	1.13"	0.88"
Metric Units	FH-250A	L	113 kg	7 mm	64 mm	80 mm	57 mm	145 mm	21 mm	29 mm	18 mm
	FH-500A	Q	227 kg	5 mm	64 mm	80 mm	57 mm	145 mm	21 mm	29 mm	18 mm
	*FH-900C	R	408 kg	5 mm	76 mm	102 mm	121 mm	203 mm	29 mm	29 mm	22 mm

*Housing will differ in appearance from drawing



United States

6300 Irelan Place
P.O. Box 655
Dublin, Ohio 43017
Phone: 614-889-0480
Fax: 614-889-0540

Canada

1720 Meyerside Drive
Mississauga, Ontario
L5T 1A3
Phone: 905-670-4922
Fax: 905-670-1698

www.kineticsnoise.com
sales@kineticsnoise.com

Kinetics Noise Control, Inc. is continually upgrading the quality of our products. We reserve the right to make changes to this and all products without notice.