


# SFH 1" DEFLECTION ISOLATION HANGER

TYPE	L	H	W	A	Dmax
1-2200/3500	2.00	9.50	5.00	4.75	1.00

I-P UNITS (INCHES AND POUNDS)

## STANDARD RATINGS

TYPE	SIZE	COIL	COIL FREE HT	O.D.	RATED LOAD
SFH	1-2200	ORG/GRY	4.20	3.00	2200
SFH	1-2465	BLUE	4.20	3.00	2465
SFH	1-2865	BLU/GRY	4.20	3.00	2865
SFH	1-3500	BLU/BRN	4.20	3.00	3500

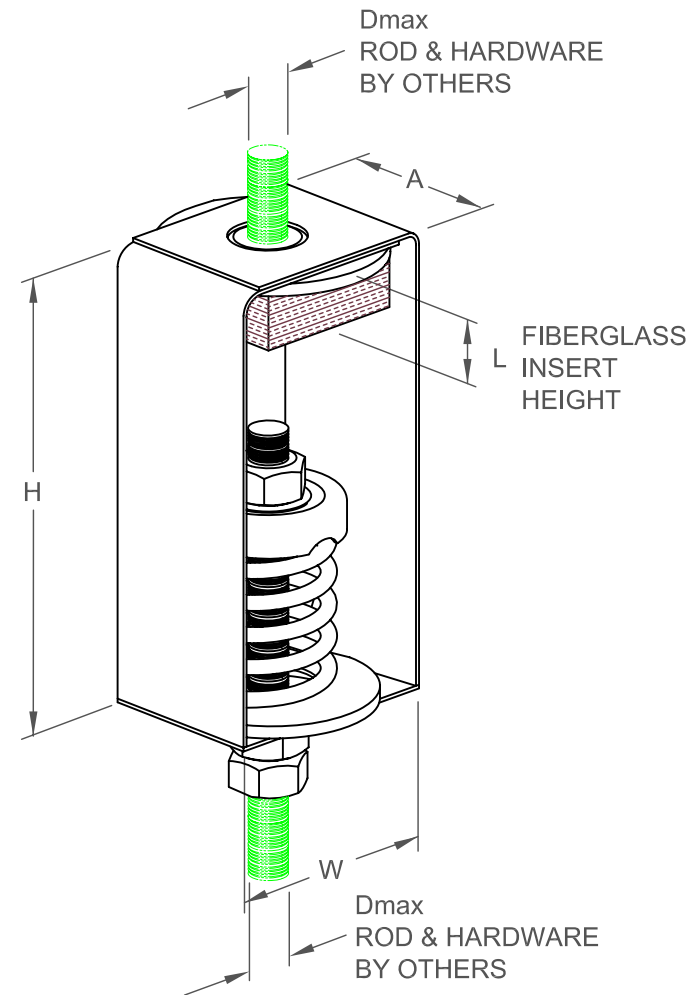

## SPECIFICATIONS:

- SPRING ELEMENTS AND BRACKETS ARE POWDER COATED
- LOAD PLATES ARE BRIGHT ZINC PLATED
- ISOLATION HANGERS HAVE A TYPICAL OVERLOAD OF 50%
- ISOLATION HANGERS HAVE A MINIMUM  $K_x/K_y$  RATIO OF 1.0
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING
- "NO SHORT" STEP CAP



KINETICS NOISE CONTROL, INC  
6300 IRELAN PL,  
DUBLIN, OH 43017 USA  
Ph: 614 889-0480, Fax: 614 889-0540  
www.kineticsnoise.com

Model:  
**SFH**  
1-2200/3500

By: **JMJ**  
Date: 10/24/03  
Revised: 08/23/04 / BB

Drawing No:  
**S-03.35-14**