


RATED LOAD POUNDS	SPRING COLOR	RATED DEFLECTION INCHES	DIMENSIONS IN INCHES				
			A	B	C	D	E
SH-2-2000	ORANGE	2.00	6.00	12.00	6.00	1.00	7.00
SH-2-2500	BLUE	2.00	6.00	12.00	6.00	1.00	7.00



- SH-2 ISOLATION HANGERS HAVE A MINIMUM K_x/K_y OF 1.2
- SH-2 ISOLATION HANGERS HAVE A TYPICAL OVERLOAD CAPACITY OF 50%
- SH-2 SPRING ELEMENTS ARE SAFE FOR SOLID LOADING
- SH-2 HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
- SH-2 HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING
- SH-2 SPRING ELEMENTS AND BRACKETS ARE PAINTED

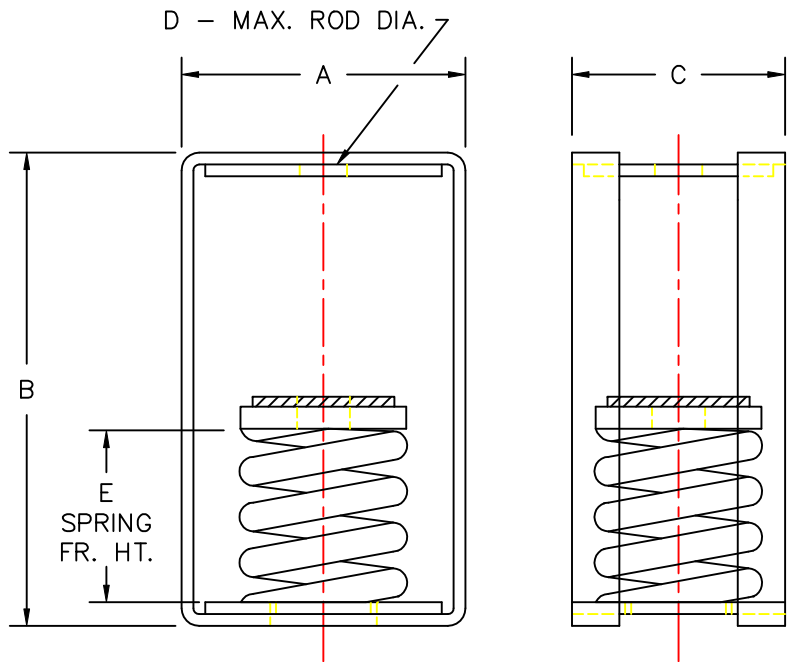

TITLE
MODEL SH-2 HANGER

LAST DATE
REVISED
3/20/96

DRAWN BY
DW

DRAWING NO. S-DWG
S-03.36-2C