



MODEL	COLOR	SPRING						DIMENSION									
		RATED				O.D.		A		B		C		D		E	
		LOAD (lb)	LOAD (kg)	DEFLECTION (in)	DEFLECTION (mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)
SHAA-1-25	BLACK	25	11	1.0	26.6	1.23	31.2	2.15	54.6	4.00	101.6	1.50	38.1	0.69	17.5	2.50	63.5
SHAA-1-45	BROWN	45	20	1.0	25.8	1.23	31.2	2.15	54.6	4.00	101.6	1.50	38.1	0.69	17.5	2.50	63.5
SHAA-1-55	ORANGE	55	25	0.9	23.3	1.23	31.2	2.15	54.6	4.00	101.6	1.50	38.1	0.69	17.5	2.50	63.5
SHAA-1-71	RED	71	32	0.8	21.0	1.23	31.1	2.15	54.6	4.00	101.6	1.50	38.1	0.69	17.5	2.50	63.5

D - TOP HOLE DIA.

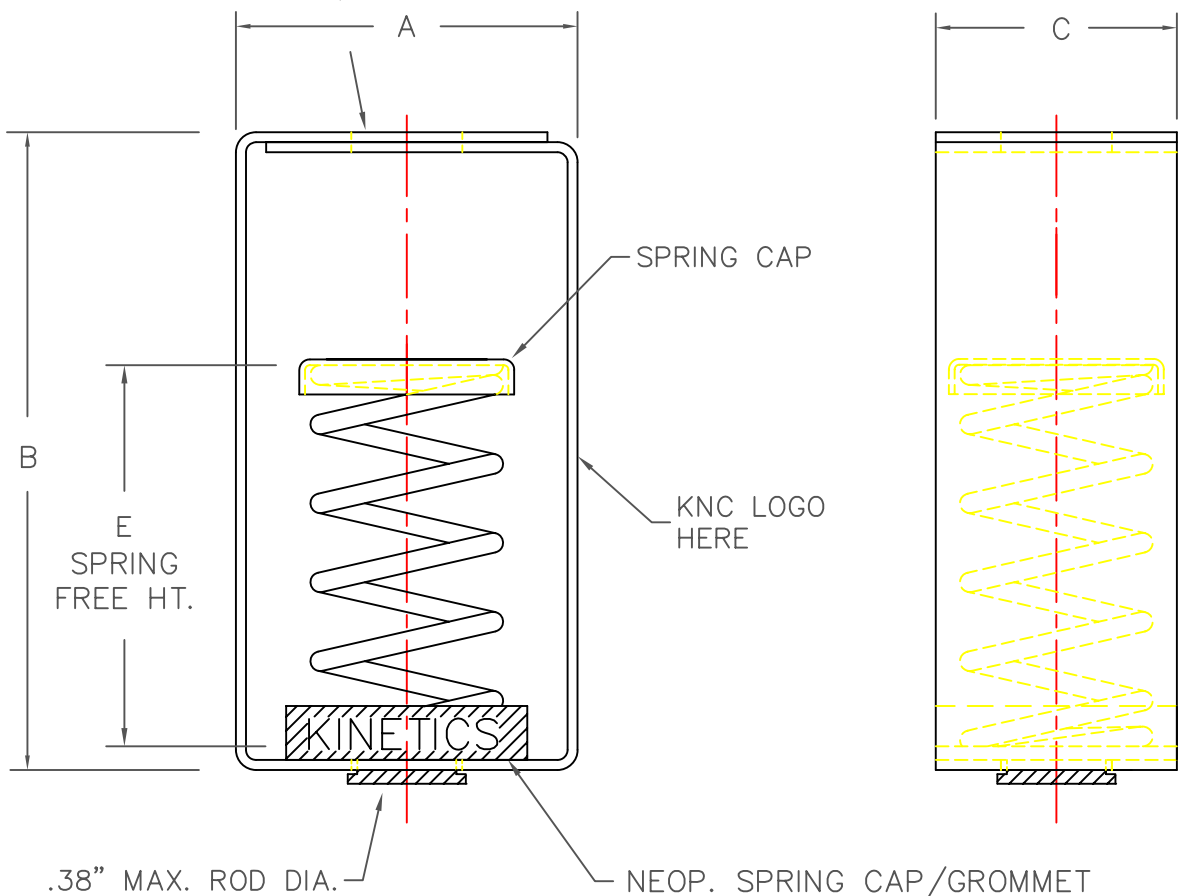

1. SHAA-1 ISOLATION HANGERS HAVE A MINIMUM K_x/K_y OF 1.0
2. SHAA-1 ISOLATION HANGERS HAVE A TYPICAL OVERLOAD CAPACITY OF 50%
3. SHAA-1 SPRING ELEMENTS ARE SAFE FOR SOLID LOADING
4. SHAA-1 HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
5. SHAA-1 SPRING, BRACKET AND SPRING CAP TO BE BRIGHT ZINC PLATED

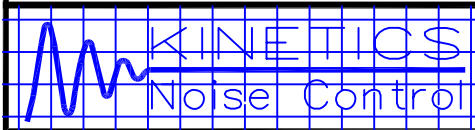

TITLE
MODEL SHAA HANGER

LAST DATE REVISED
07/25/00

DRAWN BY
DW

DRAWING NO.
S-03.42-1B

S-03