


# SRH 2" DEFLECTION ISOLATION HANGERS

IP UNITS (INCHES AND POUNDS)

TYPE	L	H	W	A	Dmax
2-260/1200	1.75	8.59	5.58	3.63	0.88

STANDARD RATINGS				SPRING COIL			INSERT
TYPE	SIZE	LOAD	DEFL.	COLOR	FREE HT.	O.D.	COLOR
SRH	2-260	260	2.21	BLUE	4.20	3.00	GREEN
SRH	2-465	465	2.01	GREEN	4.20	3.00	WHITE
SRH	2-720	720	2.07	BLACK	4.20	3.00	PURPLE
SRH	2-850	850	1.97	WHITE	4.25	3.00	YELLOW
SRH	2-1025	1025	1.99	BEIGE	4.25	3.00	YELLOW
SRH	2-1200	1200	2.00	CHROME	4.50	3.00	YELLOW

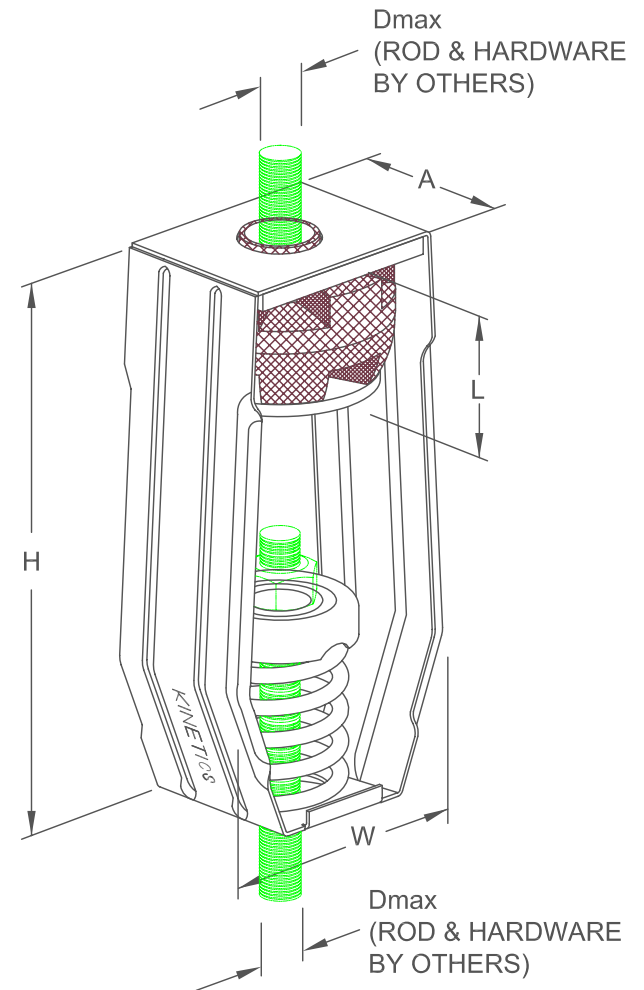

## SPECIFICATIONS:

- SPRING ELEMENTS AND BRACKETS ARE POWDER COATED
- LOAD PLATES ARE BRIGHT ZINC PLATED
- ISOLATION HANGERS HAVE A MINIMUM  $K_x/K_y$  RATIO OF 1.1
- SPRING ELEMENTS ARE SAFE AT SOLID LOADING
- HANGER BRACKETS WILL CARRY (5) TIMES OVERLOAD WITHOUT FAILURE
- HANGER BRACKETS WILL ALLOW 30° ROD MISALIGNMENT WITHOUT SHORT CIRCUITING
- "NO SHORT" STEP CAP



KINETICS NOISE CONTROL, INC  
 6300 IRELAN PL,  
 DUBLIN, OH 43017 USA  
 Ph: 614 889-0480, Fax: 614 889-0540  
[www.kineticsnoise.com](http://www.kineticsnoise.com)

Model:  
**SRH**  
 2-260/1200

By: **BB**  
 Date: 11/03/04  
 Revised: /

Drawing No:  
**S-03.37-22**